




# APOLON LED


**BODY** Die cast aluminium  
**SOURCE** LUGA Line RX LED Module (ON BOARD)  
**REGULATION** Manufactured in accordance with EN 60598  
**PROTECTION DEGREE AGAINST MOISTURE AND DUST** IP65

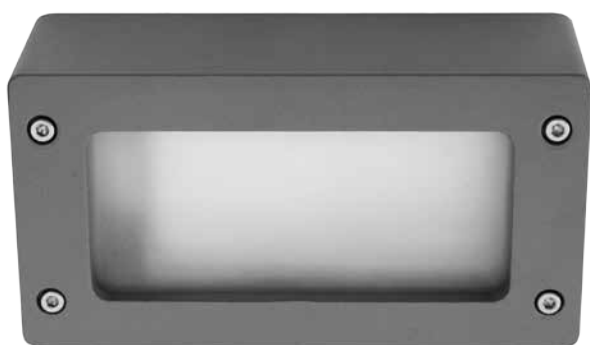

KELVIN	2W@350 mA		4,1W@700 mA	
	Lm	Lm/W	Lm	Lm/W
3000	255	128	475	116
4000	270	135	500	112

\*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρήνα led.

CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR
36	2W (02)	3000K (30)	80 (80)	78° (78)	ON OFF (C)	WHITE (-01)
	4,1W (04)	4000K (40)				BLACK (-03)
OTHER*** (-XX)						
FINAL CODE						
36	-- (WATT)	-- (KELVIN)	-- (CRI)	-- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)

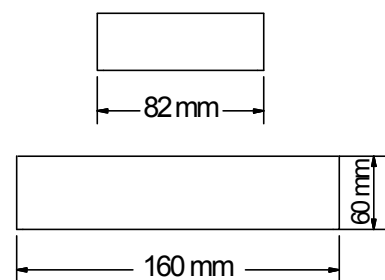

\* To create the final product code add after their original prefix the orange numbers or letters, inside the parentheses, according to your choice. \*\*Available in other colours, see page 10.