




# ASIA COB LED

- BODY** Steel frame and die cast aluminium internal spot
- SOURCE** Chip On Board (COB) LED Module
- ELECTRIC EQUIPMENT** Constant Current LED Driver: On/Off • Dali • Dim 1-10V • Phase Cut • Push Button • Emergency
- CHARACTERISTICS** CRi 80 • Colour Consistency <3SDCM • LOR 91 • Power Factor 0,96
- UPON REQUEST** Constant Lumen Operation • CCT 2700K - 3500K - 5000K • CRi 90 & 97
- REGULATION** Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68/EOK
- SPECIAL APPLICATIONS** For food and meat stores



CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR	
17	16,2W (16)	3000K (30)	80 (80)	12° (12)	ON - OFF (C)	WHITE (-01)	
	23,2W (22)				DALI (D)	BLACK (-03)	
	30,4W (31)		90 (90)	24° (24)	DIM 1 - 10 V (V)		
	35,9W (35)	PHASE CUT (P)			ALUMINUM (-26)		
	41,6W (42)	4000K (40)			40° (40)	PUSH BUTTON (B)	OTHER** (-XX)
	49,3W (49)					EMERGENCY (A)	
<b>FINAL CODE</b>							
17	-- (WATT)	-- (KELVIN)	-- (CRI)	-- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)	

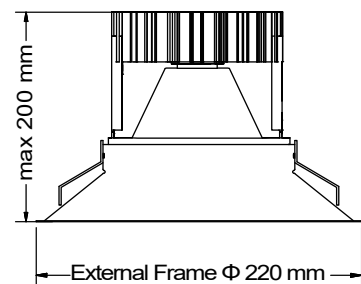

Cutting Hole Diameter 200 mm

\* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. \*\*Available in other colours, see page 10.

COLOUR TEMPERATURE KELVIN	16,2W @500mA		23,2W @700mA		30,4W @900mA		35,9W @1050mA		41,6W @1200mA		49,3W @1400mA	
	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W
3000K	2854	176	3899	168	4888	161	5596	156	6278	151	7247	147
4000K	3011	186	4115	177	5159	170	5907	165	6628	159	7638	155

\*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.