

DISC

MOUNTED ON CEILING - SUSPENDED



A premium circular LED luminaire, made of high quality extruded aluminum profile, which provides 120° continuous lighting. Available in multiple dimensions and finishes (powder coated or anodized) Suitable for professional and/or commercial spaces and stores.

Code 96504 for mounting set, up to 1,5m long.  
3 or more mounting sets required for suspended lights.

Code 1656 for ceiling base.



BODY

Aluminum, powder coated

SOURCE

PrevaLED Linear LED Module of European origin

ELECTRIC EQUIPMENT

Constant Current LED Driver: On/Off • Push Button • Dali • Dim 1-10V with Dimmer • Push Button

OPTIC EQUIPMENT

PMMA Opal Diffuser

CHARACTERISTICS

CRI 80 • CCT 3000K - 4000K • Colour Consistency <3SDCM • LOR 90 • Power Factor 0,96 • 50.000 hrs


REGULATION

Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68 EOK


SPECIAL APPLICATIONS

Combination of architectural and decorative lighting

DIAM. (cm)	60	90	120	150	200
	LUMEN				
3000 Kelvin	5730	13140	21060	35040	74460
4000 Kelvin	6150	14100	22600	37600	79900

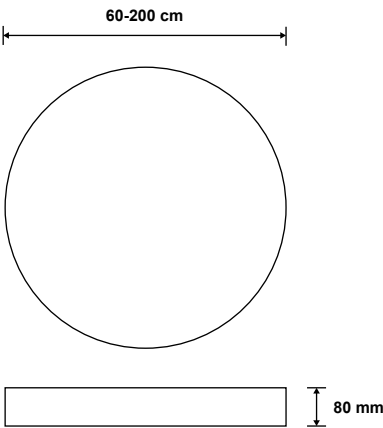

INSTALLATIONS



CODE*	WATT	DIAM. (cm)	KELVIN	DRIVER	COLORS
532	043	060	3000 (3)	ON-OFF (C)	WHITE (01)
	108	090			BLACK (03)
	169	120		PUSH BUTTON (B)	ANODIZED (26)
	288	150	WALNUT (52)		
	612	200	4000 (4)	1-10V (V)	BIRCH (54)
				DALI (D)	WENGE (51)
SAFETY (S)				MARBLE (53)	
FINAL CODE					
532	--- (WATT)	--- (DIAM.)	-- (KELVIN)	- (DRIVER)	-- (COLORS)

\*To create the final product code add after their original prefix the orange numbers or letters, inside the parentheses, according to your choice.