



ITHAKI COB LED

- BODY** Aluminium
- SOURCE** Chip On Board (COB) LED Module • VOSSLOH SCHWABE READY LINE COB (230V) • BRIDGELUX VERO 29 (ON BOARD)
- ELECTRICAL EQUIPMENT** On/Off
- CHARACTERISTICS** CCT 3000K - 4000K - 5000K • Protection degree IP20 • CRI 70, 80 • LOR 92 • Power Factor > 0,96 • Silicon lens 69 degrees
- REGULATION** Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68/EOK
- SPECIAL APPLICATIONS** For food and meat stores
- ACCESSORIES** Cross (CODE: 468623)

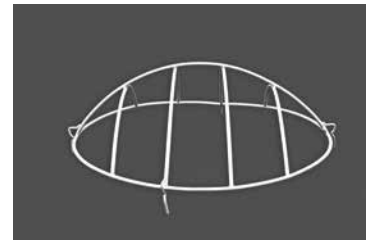

CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR
59	80W (80)	3000K (30)	70 (70)	69° (69)	ON - OFF (C)	WHITE (-01)
		4000K (40)				BLACK (-03)
	110W (110)	5000K (50)	80 (80)			ALUMINUM (-26)
FINAL CODE						
59	-- (WATT)	-- (KELVIN)	-- (CRI)	-- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)



* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. ***Available in other colours, see page 10.

COLOUR TEMPERATURE KELVIN	80W @2100 mA		110W @2800 mA	
	Lm	Lm/W	Lm	Lm/W
3000K	10475	131	13386	122
4000K	10933	137	13971	127

*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.