




LEGO COB LED ΣΤΑΘΕΡΟ


BODY	Die cast aluminum
SOURCE	Chip On Board (COB) LED Module
ELECTRIC EQUIPMENT	Constant Current LED Driver: On/Off • Dali • Dim 1-10V • Phase Cut • Push Button • Emergency
CHARACTERISTICS	CRi>80 • Colour Consistency <3SDCM • LOR 90 • 3000K - 4000K • IP44 Front protection
UPON REQUEST	Constant Lumen Operation • CCT 2700K - 3500K - 5000K • CRi>90 & 97 • IP65 Front protection
REGULATION	Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68/EOK
SPECIAL APPLICATIONS	For food and meat stores

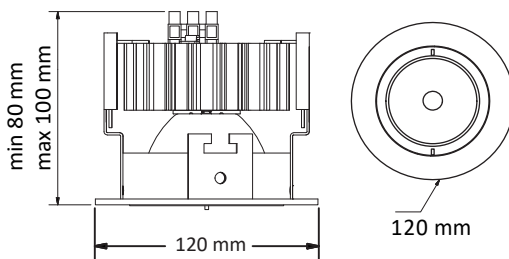

Cutting Hole Diameter 100 mm
Τρύπα Κοπής Διαμέτρου Φ100 mm

COLOUR TEMPERATURE KELVIN	11,2W @350mA		16,2W @500mA		23,2W @700mA		26,7W @800mA	
	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W
3000K	2027	181	2854	176	3899	168	4400	165
4000K	2139	191	3011	186	4115	177	4644	174

CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR	
27	11,2W (13)	2700K (27)	80 (80)	12° (12)	ON - OFF (C)	WHITE (-01)	
		3000K (30)			DALI (D)	BLACK (-03)	
	16,2W (16)	3500K (35)	90 (90)	24° (24)	DIM 1 - 10 V (V)	ALUMINUM (-26)	
		4000K (40)			PHASE CUT (P)		
	23,2W (24)	5000K (50)	97 (97)	40° (40)	PUSH BUTTON (B)	OTHER** (-XX)	
					EMERGENCY (A)		
	FINAL CODE						
	27	-- (WATT)	-- (KELVIN)	-- (CRI)	-- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)



Κατόπιν παραγγελίας με μπροστινή προστασία IP65
Upon request with IP65 front protection

* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. **Available in other colours, see page 10.