




PETER AC CUBE LED

BODY	Steel frame and die cast aluminium internal spot
SOURCE	CUBE AC LED Module 230 V (ON BOARD)
ELECTRIC EQUIPMENT	Constant Current LED Driver: On/Off
CHARACTERISTICS	CRi>80 • LOR 90
REGULATION	Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68/EOK
SPECIAL APPLICATIONS	Upon request with IP44 front protection

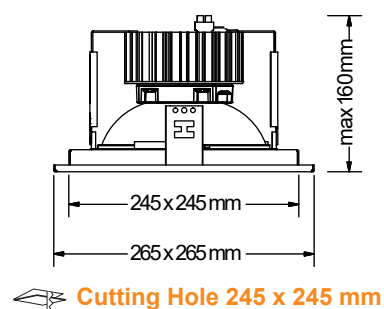


CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR
41	17.6W (20)	3000K (30)	80 (80)	110° (110)	ON - OFF (C)	WHITE (-01)
						BLACK (-03)
	27W (30)	4000K (40)				ALUMINUM (-26)
						OTHER** (-XX)
FINAL CODE						
41	-- (WATT)	-- (KELVIN)	-- (CRI)	--- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)

* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. **Available in other colours, see page 10.

COLOUR TEMPERATURE KELVIN	17.6W	27W
	Lumen	Lumen
3000	2000	3000
4000	2000	3000

*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.



Κατόπιν παραγγελίας με μπροστινή προστασία IP44
Upon request with IP44 front protection