



RADIUS

MOUNTED ON CEILING - SUSPENDED




A premium circular LED luminaire, made of high quality extruded aluminum profile, which provides 120° continuous lighting. Available in multiple dimensions and finishes (powder coated or anodized). Suitable for professional and/or commercial spaces and stores.



Code 96504 for mounting set, up to 1,5m long.
3 or more mounting sets required for suspended lights.

Code 1656 for ceiling base.

DIAM. (cm)	60	90	120	150	200
	LUMEN				
3000 Kelvin	7144	11430	17146	21432	28576
4000 Kelvin	7530	12048	18072	22590	30120

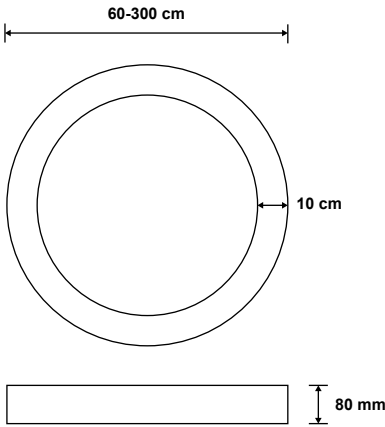

INSTALLATIONS

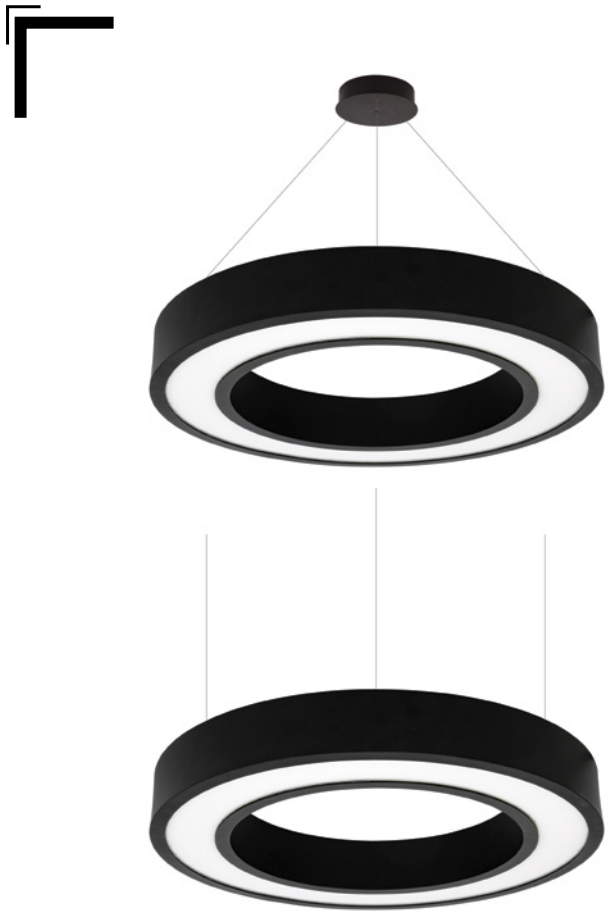

BODY
Aluminum, powder coated

SOURCE
PrevaLED Linear LED Module of European origin

ELECTRIC EQUIPMENT
Constant Current LED Driver: On/Off • Push Button •
Dali • Dim 1-10V with Dimmer • Push Button

OPTIC EQUIPMENT
PMMA Opal Diffuser

CHARACTERISTICS
CRI 80 • CCT 3000K - 4000K • Colour Consistency
<3SDCM • LOR 90 • Power Factor 0,96 • 50.000 hrs

REGULATION
Manufactured in accordance with the Regulation EN
60598-1 and CE 93/68 EOK

SPECIAL APPLICATIONS
Combination of architectural and decorative lighting

CODE*	WATT	DIAM. (cm)	KELVIN	DRIVER	COLORS
512	045	060	3000 (3)	ON-OFF (C)	WHITE (01)
	072	090			BLACK (03)
	108	120		PUSH BUTTON (B)	ANODIZED (26)
	135	150	1-10V (V)	WALNUT (52)	
			4000 (4)	DALI (D)	BIRCH (54)
	180	200		SAFETY (S)	WENGE (51)
MARBLE (53)					
FINAL CODE					
512	--- (WATT)	--- (DIAM.)	-- (KELVIN)	- (DRIVER)	-- (COLORS)

*To create the final product code add after their original prefix the orange numbers or letters, inside the parentheses, according to your choice.