




ROMA COB LED

- BODY** Die cast aluminum
- SOURCE** Chip On Board (COB) LED Module
- ELECTRIC EQUIPMENT** Constant Current LED Driver: On/Off • Dali • Dim 1-10V with Dimmer • Phase Cut
- CHARACTERISTICS** CRi 80 • Colour Consistency <3SDCM • LOR 90 • Power Factor 0,96
- UPON REQUEST** Constant Lumen Operation • CCT 2700K - 3500K - 5000K • CRi 90 & 97
- REGULATION** Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68/EOK
- SPECIAL APPLICATIONS** For food and meat stores
- AVAILABLE** Based on wall mounting (prefix A) • Και με βάση για επίτοιχνη στήριξη (πρόθεμα A)
- ACCESSORY** Barndoors, code 20-K038-468622  Honeycomb, code 272128 

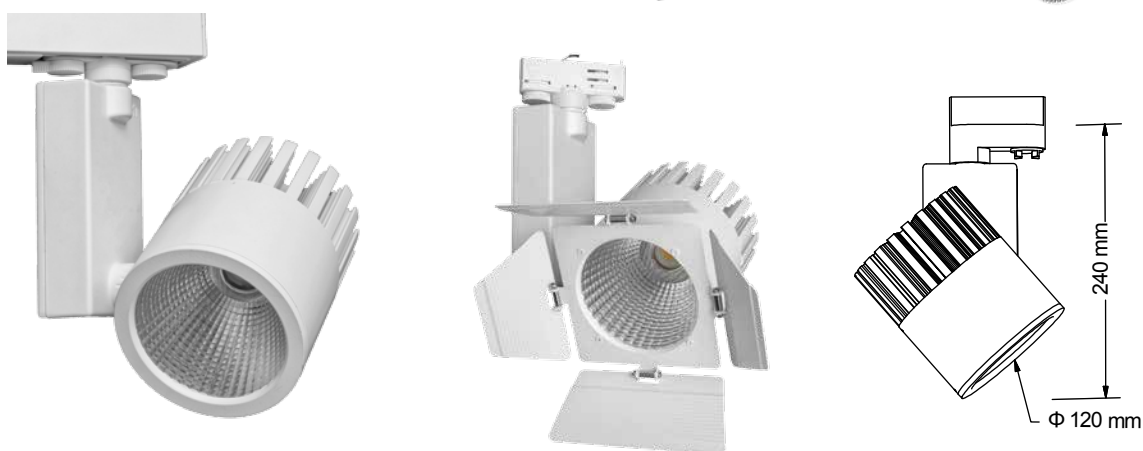

CODE*	WATT	KELVIN	CRI	REFLECTOR DEGREES	LED DRIVER	COLOUR
14	16,2W (16)	3000K (30)	80 (80)	12° (12)	ON - OFF (C)	WHITE (-01)
	23,2W (22)			24° (24)	DALI (D)	BLACK (-03)
	30,4W (31)	4000K (40)	90 (90)	40° (40)	1 - 10 V WITH DIM (I)	ALUMINUM (-26)
	35,9W (38)			60° (60)	PHASE CUT (P)	OTHER*** (-XX)
	49,3W (48)			BASE MOUNTING** (A)		
FINAL CODE						
14	-- (WATT)	-- (KELVIN)	-- (CRI)	-- (REFLECTOR DEGREES)	-- (LED DRIVER)	-- (COLOUR)

* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. **Prefix "A" for based on wall mounting. ***Available in other colours, see page 10.

COLOUR TEMPERATURE KELVIN	16,2W @500mA		23,2W @700mA		30,4W @900mA		35,9W @1050mA		49,3W @1400mA	
	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W	Lm	Lm/W
3000K	2854	176	3899	168	4888	161	5596	156	7247	147
4000K	3011	186	4115	177	5159	170	5907	165	7638	15

*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.

