



CURVES

SNAKE

MOUNTED ON CEILING - SUSPENDED



A premium curved LED luminaire, made of high quality extruded aluminum profile, which provides 120° continuous lighting.

Available in multiple dimensions and finishes (powder coated or anodized).

Suitable for professional and/or commercial spaces and stores.

Code 96504 for mounting set, up to 1,5m long.

2 or more mounting sets required for suspended lights.

BODY

Aluminum, powder coated

SOURCE

PrevaLED Linear LED Module of European origin

ELECTRIC EQUIPMENT

Constant Current LED Driver: On/Off • Push Button • Dali • Dim 1-10V with Dimmer • Push Button

OPTIC EQUIPMENT

PMMA Opal Diffuser

CHARACTERISTICS


CRi 80 • CCT 3000K - 4000K • Colour Consistency <3SDCM • LOR 90 • Power Factor 0,96 • 50.000 hrs

REGULATION

Manufactured in accordance with the Regulation EN 60598-1 and CE 93/68 EOK

SPECIAL APPLICATIONS

Combination of architectural and decorative lighting

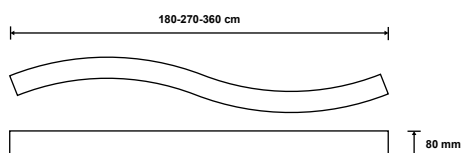

INSTALLATIONS



CEILING MOUNTED



SUSPENDED

LENGTH (cm)	180	270	360
	LUMEN		
3000 Kelvin	8572	12859	17145
4000 Kelvin	9036	13554	18072

CODE*	WATT	LENGTH (cm)	CCT	DRIVER	COLORS
852	054	180	3000 (3)	ON-OFF (C)	WHITE (01)
					BLACK (03)
	081	270	4000 (4)	PUSH BUTTON (B)	ANODIZED (26)
					WALNUT (52)
	108	360	1-10V (V)	BIRCH (54)	
			DALI (D)	WENGE (51)	
SAFETY (S)			MARBLE (53)		
FINAL CODE					
852	--- (WATT)	--- (DIAM.)	-- (KELVIN)	- (DRIVER)	-- (COLORS)

*To create the final product code add after their original prefix the orange numbers or letters, inside the parentheses, according to your choice.