




# SYROS LED WATERPROOF

**BODY** Stainless steel and cast-pressed aluminium  
**SOURCE** VOSSL0H ReadyLine (COB) 230V (ON BOARD)  
**REGULATION** Manufactured in accordance with EN 60598-1 and CE 93/68/EOK  
**PROTECTION DEGREE AGAINST MOISTURE AND DUST** IP65  
**LUMINAIRE INSIDE:** Oxygen Luminaire



| CODE*      | WATT         | KELVIN         | CRI         | REFLECTOR DEGREES         | LED DRIVER         | COLOUR           |
|------------|--------------|----------------|-------------|---------------------------|--------------------|------------------|
| 7232       | 6,2W<br>(6)  | 3000K<br>(30)  | 80<br>(80)  | 12°<br>(12)               | ON - OFF<br>(C)    | WHITE<br>(-01)   |
|            |              | 4000K<br>(40)  |             | 24°<br>(24)               |                    | BLACK<br>(-03)   |
|            |              |                |             | 40°<br>(40)               |                    | OTHER**<br>(-XX) |
| FINAL CODE |              |                |             |                           |                    |                  |
| 7232       | --<br>(WATT) | --<br>(KELVIN) | --<br>(CRI) | --<br>(REFLECTOR DEGREES) | --<br>(LED DRIVER) | --<br>(COLOUR)   |

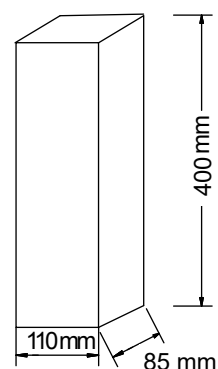

\* To create the final product code add after their original prefix the orange numbers or letters, inside the parentheses, according to your choice. \*\*Available in other colours, see page 10.

| KELVIN | 6W  |      |
|--------|-----|------|
|        | Lm  | Lm/W |
| 3000   | 498 | 83   |
| 4000   | 522 | 87   |

\*Luminous flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.