



FOCUS DOWN LED

LED VOSSLOH ActiveLine LED Module



BODY Aluminium

SOURCE Chip On Board (COB) LED VOSSLOH ActiveLine LED Module • OSRAM PrevaLED Coin 50g2 Module (ON BOARD)

REGULATION Manufactured in accordance with EN 60598-1 and CE 93/68/EOK

PROTECTION DEGREE AGAINST MOISTURE AND DUST

IP65

OSRAM PrevaLED Coin 50g2 Module




*Luminus flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.

*Luminus flux & power consumption of led. Φωτεινή ροή & κατανάλωση πυρίνα led.



| CODE* | WATT | KELVIN | CRI | REFLECTOR DEGREES | LED DRIVER | COLOUR |
|---|--------------|-------------------|------------|-------------------|-----------------|------------------|
| 7A | 6,2W (06) | 3000K (30) | 80 (80) | 12° (12) | ON - OFF (C) | WHITE (-01) |
| | | 4000K (40) | | 24° (24) | | BLACK (-03) |
| | | | | 40° (40) | | OTHER** (-XX) |
| 7A | 9,2W (09) | 3000K (3) | 80 (80) | 12° (12) | ON - OFF (C) | WHITE (-01) |
| | | 4000K (4) | | 24° (24) | | BLACK (-03) |
| | | | | 40° (40) | | OTHER** (-XX) |
| | | | | 60° (60) | | |
| | | FINAL CODE | | | | |
| --- (WATT) -- (KELVIN) -- (CRI) -- (REFLECTOR DEGREES) - (LED DRIVER) - --- (COLOUR) | | | | | | |

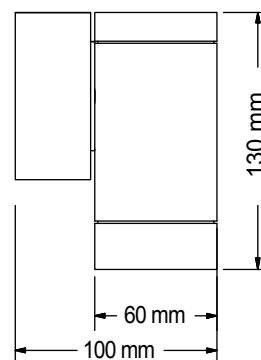

* To create the final product code add after their original prefix the **orange numbers or letters**, inside the parentheses, according to your choice. **Available in other colours, see page 10.

| KELVIN | 6,2W @350 mA | |
|--------|-----------------|------|
| | Lm | Lm/W |
| 3000 | 615 | 99 |
| 4000 | 645 | 104 |

| KELVIN | 9,2 W | |
|--------|-------|------|
| | Lm | Lm/W |
| 3000 | 800 | 87 |
| 4000 | 830 | 90 |